


C168H Series

8-Port RS-232 PCI/ISA Card

Features

- 8-port RS-232 High Speed Communication Board
- Compact PCI/ISA board size
- Versatile OS driver support
- Various connection options
- Data transmission speeds up to 921.6 Kbps
- On-chip hardware flow control
- Easy configuration without switches or jumpers
- Convenient connection cables

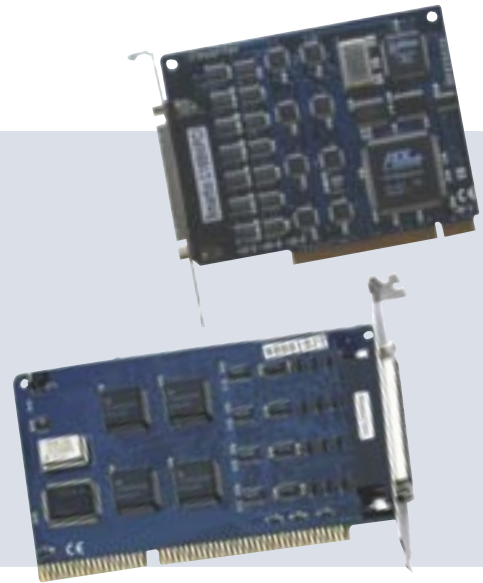

Overview

The Smartio C168H Series allows you to install additional RS-232 serial communication ports on your PC by providing 8 serial ports per board for connecting all types of serial device, including terminals, modems, printers, data acquisition equipment, and more. And C168H's versatile OS driver

support truly fulfills the needs of our customers' varied applications. This product is available for use on either a PCI or ISA bus, with both types offering a reliable, high performance solution for serial multiport communications.

Supported OS Drivers

MOXA's COM port driver not only supports all major Operating Systems, but also the following dedicated OSs for customers' special needs.

DOS
AT&T UNIX SVR4.2
MITUX SVR4.2
Unix WareSVR4.2
Unix Ware7 SVR5

SCO Open Server
SCO UNIX
SCO XENIX
QNX 4.2.x
FreeBSD



Specifications

Hardware

I/O controller: 16C550C or compatible x 8

Interface

Bus: PCI ver. 2.1 (32-bit) or ISA (16-bit)

Performance

Speed: 50 bps to 921.6 Kbps
 Max. No. of ports: 32 (4 boards)

Configuration

Parity: None, even, odd, space, mark

Data bits: 5, 6, 7, 8

Stop bits: 1, 1.5, 2

IRQ: ISA: 2, 3, 4, 5, 7, 10(Default), 11, 12, 15
 (PCI assigned by BIOS)

I/O address: ISA: 0x0000 - 0xFFFF (Default: 0x180)
 (PCI assigned by BIOS)

OS Supported

Windows 95/98/ME/NT/2000/XP, Linux
 (For more details, refer to the OS support section.)

Power and Environment

Power requirements:

C168H/PCI: 260 mA (+5V), 100 mA (+12V), 60mA (-12V)

C168H: 170 mA (+5V), 100 mA (+12V), 60 mA (-12V)

Operating Temperature

0 to 55°C

Regulatory Approvals

FCC, CE

Operating Humidity

5 to 95% RH

Storage Temperature

-20 to 85°C

Dimensions

C168H/PCI: 123 x 100 mm (WxD)

C168H/C168HS: 157 x 93 mm (WxD)

Connection Options for C168H Series



Box Connection Opt 8A (DB25 Female) Opt 8B (DB25 Male)

- *Tx/D, Rx/D LED Indicators
- *150 cm Male Connection Cable




Cable Connection Opt 8C (DB25 Male) Opt 8D (DB9 Male)


- *100 cm cable length
- *Reversible Connector Header

Pin Assignment


DB25 Female (Opt 8A)




DB25 Male (Opt 8B/C)



Bi-Directional Reversible Connector




*Connect to Female Connector



*Connect to Male Connector

DB9 Male (Opt 8D)



Ordering Information

C168H/PCI: PCI bus, 8-port serial board

C168H: ISA bus, 8-port serial board

C168HS: ISA bus, 8-port serial board w/Surge Protection

All items include: MOXA Software CD-ROM, User's Manual

Optional Connectors (choose one per board)

Opt8A: 8-port DB25 female connection box (connection cable included)

Opt8B: 8-port DB25 male connection box (connection cable included)

Opt8C: 8-port DB25 male connection cable

Opt8D: 8-port DB9 male connection cable

*For PCI Surge Protection Solution, refer to the Universal PCI section.

*For more RS-232 to RS-422/485 box options, refer to Serial Connector Options.