


SER2PCI3V-L

2 x RS232 serielle porte til PCI. Plug & play, høj og lav bagplade, TITAN PCI-200LP UPCI Vscom FEATURES

- 2 x RS232 seriel porte med plug & play
- 1 x TITAN BSP9216B (chipset)
- 1 x DB25 han connector på kortet
- 1 x DB25 female til to DB9 han adapter kabler inkluderet

Bus: universal PCI (5V og 3.3V) 32 bit 33MHz
RS232 signal: DCD, RxD, TxD, DTR, GND, DSR, RTS, CTS, RI
Maks. bitrate: 921.6kbps
Hver port med 16 bit FIFO for transmit & recieve
IS support: Windows, Linux
0°C to 60°C

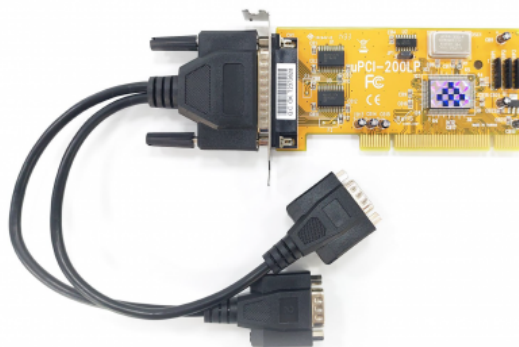

SPECIFICATIONS

Chipset	:	TITAN BSP9216B
Baudrate	:	Maks. 921,6 Kbit/sekund
Drivere	:	DOS, Windows 98, NT, 2000, XP, Win7, 2003, Linux og Vista
FIFO	:	16 bytes
I/O	:	Plug and Play
Porte	:	2
RAID niveau	:	Universal PCI (5V and 3.3V) 32 bit 33MHz
Spænding	:	3,3 og 5 V. kompatibel med PCI-X
Stik	:	2 x DB9 han (blæksprutte)
UART	:	16C550

