

Profibus DP master til Ethernet slave-enheder Gateway. DIN skinne.

FEATURES

Gateway fra Ethernet-slave til Profibus-master
Protokol/hierarki: DP-V0 Slave
PROFIBUS hastighed (kbps) i 10 step fra 9.6 - 12000

Hastighedsindstilling er automatisk


Maks. Inputdatalængde: 240 byte

Maks. Outputdatalængde: 240 byte

Adresseindstilling: 0 ~ 126 indstillet af DIP-switch eller EEPROM

Ethernet-protokol: TCP / UDP-server / klient

Konfiguration: Webkonfiguration

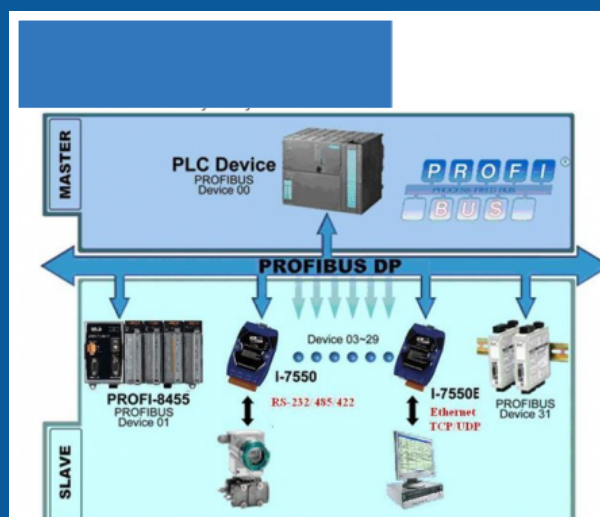

SPECIFICATIONS

Driftstemperatur	:	-25 ~ 75 °C
Controller	:	10/100Base-TX Ethernet Controller (Auto-negotiating, Auto_MDIX)
Forsyning	:	Unregulated +10 ~ +30 VDC Protection Power reverse polarity protection, Over-voltage brown-out protection Power Consumption 2.5 W
Interface	:	RS-232 (For updating firmware) COM Connector 5-pin screwed terminal block (TxD, RxD, RTS, CTS, GND)
Isolation	:	3000 VDC for DC-to-DC, 2500 Vrms for bus-to-logic
LED	:	PWR LED, RUN LED, ERR LED
Luftfugtighed	:	5 ~ 95% RH, non-condensing
Montering	:	DIN rail
Stik	:	RJ-45 with LED indicator
Dimensioner	:	72mm x 33mm x 119mm (W x L x H)

