

Indbygget PC til DIN-skinne monteret 1,6 GHz 4-kerne Celeron temperaturområde -20 ° C ~ + 60 ° C,
Mulighed: 3G / GPRS & Wifi

FEATURES

Vifteløst design

Intel® Celeron®-processor 1,6 GHz/4-kerne

1 x DDR3L-1600 SO-DIMM, op til 8 GB.

2 RS-232/422/485

4 USB

2 x 10/100/1000 Mbps Ethernet (Intel® i211AT) 1 x

PoE PD kompatibel med IEEE 802.3at-standarden

gennem LAN 1

1 DIO port

1 mSATA & SATA SSD (eller HDD)

12-24 VDC bredområde effektindgang

VGA


Barebones

OS Support Windows® 7 Embedded Windows® 8

Embedded Windows® 8, Windows® 10 Linux

supportpakke

Mulighed (3G/GPRS & Wi-Fi)

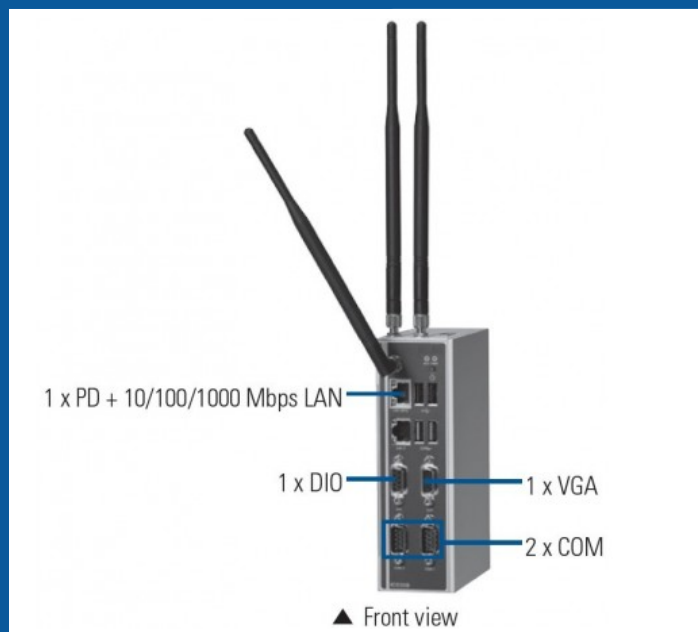

SPECIFICATIONS

CPU	:	Intel Celeron N3160 (1.6GHz / 4 CORE)
Storage	:	1 x 2½" SATA SSD (or HDD)
Digital I/O	:	1 x DIO - DB9 8-bit programming connector - The voltage of TTL is 5V. - Without isolation function - The programming is as follow: 1. I/O sink current is 8 ~ 10mA (Output drive current ±50 mA) 2. Input/Output can programming
USB	:	2 x USB 3.0 2 x USB 2.0
Driftstemperatur	:	-20°C ~ +60°C (-4°F ~ +140°F) *The frequency of CPU will down when system operating temperature over +55°C
Andet	:	AXView 2.0 (Intelligent Remote Management Solution for IoT)
BIOS	:	AMI UEFI BIOS
Antenne	:	3 x antenna
Approval	:	CE, FCC
Chok/Vibration	:	Vibration Endurance 2G @ 5 ~ 500Hz, amplitude 0.35 mm (operation/storage/transport)
Ethernet	:	2 Connections, 1 x 10/100/1000 Mbps Ethernet (Intel® i211AT) 1 x PoE PD compliant with IEEE 802.3at standard through LAN 1
Forsyning	:	Power input rating: 12 to 24 VDC, 2.09 to 1.09A Power protection: DC version OVP, reverse protectionPoE: IEEE 802.3at,



SPECIFICATIONS

Luftfugtighed	:	10% ~ 95%
Materiale	:	Construction Extruded aluminum and heavy-duty steel, IP40
Montering	:	DIN-rail, wall mount
Msata	:	1 x mSATA
OS SUPPORT	:	OS Support Windows® 7 Embedded Windows® 8 Embedded Windows® 8, Windows® 10 Linux support package
PoE	:	Supply PoE: IEEE 802.3at
Porte	:	2 x RS-232/422/485 (COM 1/2) with DB9 connectors
Trådløs	:	2 x full-size PCI Express Mini Card slots 1 x SIM socket 3 x Antenna (PS: one of Mini Card slots co-lay mSATA, supports either mSATA or full size PCI Express Mini Card)
Udgange	:	VGA
Watchdog	:	255 levels, 1 ~ 255 sec.
Dimensioner	:	Dimensions 48 mm (1.88") (W) x 110 mm (4.33") (D) x 155 mm (6.1") (H)

