


Internt M.2 interface-kort og adapter, konverter,
SATA 6Gb/s, U.2, NVMe, SATA 22pin

FEATURES

- U.2 SFF-8639 NVMe / SATA 22 pin til 1 x M.2 konverter
- 1 x U.2 SFF-8639 han stik
- 1 x SATA 6 Gb/s 22 pin
- 1 x 67 pin M.2
- SATA/ PCIe slot
- NVMe M.2 kan kun bruges med U.2 SFF-8639 port
- SATA M.2 kan kun bruges med SATA port

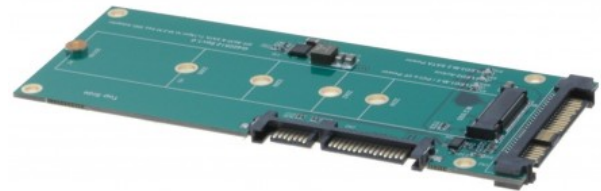

SPECIFICATIONS

ESD	:	ESD protection up to 2 kV
LED	:	power and activity
OS SUPPORT	:	Linux ex Kernel 3.2 Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
Slot	:	PCIe SATA
Stik	:	1 x U.2 SFF-8639 male (for PCIe SSDs 2 or 4 lanes) 1 x SATA 6 Gb/s 22 pin receptacle (for SATA SSDs) 1 x 67 pin M.2 key M slot
Dimensioner	:	(LxWxH): ca. 130 x 52 x 6 mm

