


24" PCAP multi-touch blæserløs panel PC, 7th Generation Intel® Core Kaby Lake i5-7300U Processor

FEATURES

- Chipset integreret i processoren (SOC)
- Full HD
- 1920 x 1080 opløsning
- Pixel: 274,5x274,5
- Kontrast: 3000
- Nits: 250
- Front IP65
- 2 x 260pin SODIMM socket
- Op til 32GB per slot (DDR4 2400 SDRAM)
- 1 x M.2 2230
- 1 x mPCIe med SATA eller PCIE x1 mSATA
- 1 x 2.5" Drive Bay (storage)
- 4 x USB 3.0
- 1 x SATA III
- 1 x HDMI
- 1 x Displayport (DP)
- 2 x RJ45
- Lyd chipset: Realtek ALC892
- 10/100/1000 Base-Tx GbE kompatibel
- Forsyningsspænding: DC +19-24V
- Driftstemperatur: 0 - 40 grader
- Vægt: 6.9 kg (Uden batter og adapter)
- Dimensioner: 538,6 x 342,6 x 45,2 mm
- OS support: Win 10 64 bit/Linux

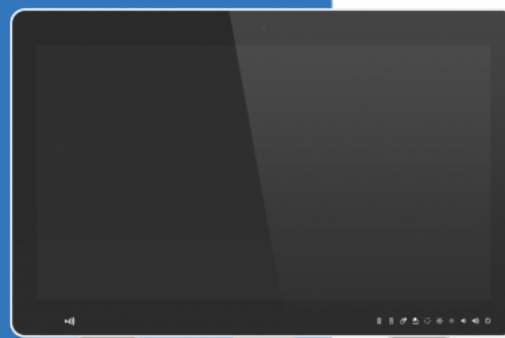

SPECIFICATIONS

Storage	:	1 x 2.5" Drive Bay
Chipset	:	integrated in Processor (SOC)
Driftstemperatur	:	0°C ~ 40°C
Batteri	:	Optional Smart Battery Pack 14.4V 6900mAh, 99.4Wh
Chok/Vibration	:	With SSD/mSATA : 1.5Grms, IEC 60068-2-64, Random, 5 ~ 500Hz, 30min/axis, With CF/SSD : 10Grms, IEC 60068-2-27, Half Sine, 11ms
Controller	:	touch controller: EETI EXC84H5680
Ethernet	:	Chipset: 1 x Intel® I211AT, 1 x Intel® I219LM
Forsyning	:	DC in +19V~24V
Hukommelse	:	2 x 260pin SODIMM socket up to 32GB Per Slot DDR4 2400 SDRAM
I/O	:	4 x USB 3.0, 1 x SATA III, 1 x HDMI, 1 x Display port, 1 x RJ45
Kamera	:	5.0M CMOS with auto-focus
Kontrast	:	250 cd/m ² , 3000



SPECIFICATIONS

Luftfugtighed	:	0% ~ 90% Relative Humidity, Non-condensing
Lyd	:	Chipset: Realtek ALC892
Lyskilde	:	LED backlight
Læser	:	Vinkel 89(U), 89(D), 89(L), 89(R)
Montering	:	Optional Mounting Kit (VESA 75 x 75, 100 x 100)
Netværk	:	10/100/1000 Base-Tx GbE compatible
Pixels	:	274.5×274.5
Skærm	:	Monitoring System Temperature & Voltage
Touch	:	Projective Capacitive
Udvidelser	:	1 x M.2 2230 1 x mPCIe with SATA or PCIE x1 mSATA
Watchdog	:	H/W Reset, 1sec. ~ 65535sec. and 1sec./step



SPECIFICATIONS

Vægt	:	6.9kg (Uden batteri og adapter)
Dimensioner	:	539.6 x 342.6 x 45.2 mm
Certifications	:	CE : IEC/EN60601-1-2 FCC : Part 15 Class B UL60601-1: AAMI /ANSI ES60601-1:2005/(R)2012 and A1:2012,C1:2009/(R)2012 and A2:2010/(R)2012 CB: IEC 60601-1/A1:2012 & EN 60601-1/A1:2013 (Ed 3.1) EN 60601-1:2006+A11:2011+A1:2013+A12:2014

