


1 kanal relæ COM, NO, NC. 30VDC, 250VAC 10A via
USB, HID

FEATURES

- Kompakt open board med 1 relæ udgang
- 250VAC / 30VDC / 10A kun resistiv belastning
- Styret fra USB via HID (F.eks. [usb-relay-hid](#))
- Forsyningsspænding: 5VDC via USB
- Intet kabinet
- Bemærk ingen software medfølger
- Hent info på USB-RELAY-HID software på nettet.

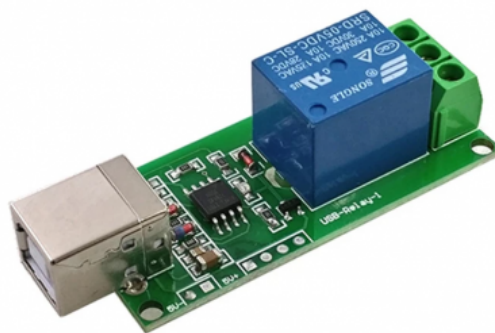

SPECIFICATIONS

Drivere	:	HID Driver
Forsyning	:	5VDC (Via USB)
Software	:	Not included. Compatible with usb-relay-hid
Stik	:	USB-B Hun
Udgange	:	1 skifterelæ 250 VAC 10 A

