


23.9" Panel PC IP66/IP69K Lukket stålskabinet med M12 Tilslutning, I3 eller I5 CPU, VESA, Yoke montage, RS232/422/485,

FEATURES

23,9" rustfrit stål panel PC
8. generations Core i5-8365UE 1,6 GHz eller Core
i3-8145UE 2,2 Ghz
1 x 260 SO-DIMM DDR4 2400MHz maks. 32 GB RAM
TPM 2.0
1 x M12 Ethernet
1 x M12 RS232/422/485 standard 232
1 x M12 USB 2.0
1 x 2½" SATA3 SSD (option)
1 x M.2 ;M-nøgle (PCIe x4/SATA3 Auto detect),
Support 2242 standard
RFID mpdul design til fron som OPT. (skal bestilles)
1 x Mini PCIe til 4G/5G. Wifi/BT
1 x Nano sim-stik
let at rengøre design
Klasse 304 rustfrit stål kabinet
(Option 316 kan bestilles special)
IP66/IP69K IP
M12 stik
Standard 250 nits, (Høj lysstyrke på forespørgsel
1000 nits)
Opløsning 1920 x 1080
Kan bestilles med Resistive Touch, Projected
Capacitive Touch og Glass (specificeret ved
bestilling)
Tryk på tænd/sluk-knap på sidekanten for
hygiejnisk rengøring
Specialbestilling kan være med 2 x M12
reservedele til (2 x USB2.0 eller 1 x USB 3.0 eller 1
x LAN eller 1 x COM)
Vesamount
YOKE-Mount som opt.
DC 9~36Vdc
OS-understøttelse: WIN 10 / WIN 11

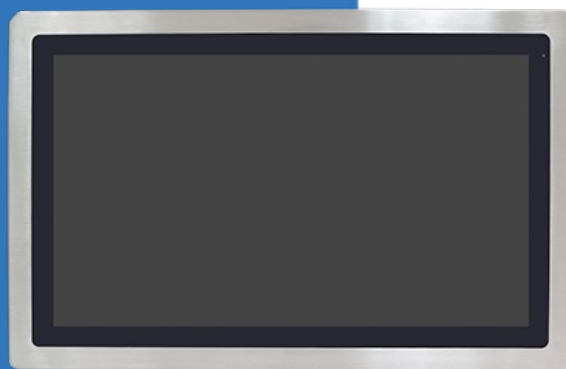

SPECIFICATIONS

Storage	:	1 x 2.5" SATA3 HDD
USB	:	M12 8-pin for USB 2.0 with waterproof cover and chain
Driftstemperatur	:	0~50°C
Hukommelse	:	260-pin SO-DIMM up to 16GB DDR4 2133MHz
Input	:	M12 3-pin for DC power with waterproof cover and chain
Lysstyrke	:	250(1000 option)
Materiale	:	304 Stainless steel chassis(default), 316 Stainless steel chassis(optional)
Montering	:	VESA mount 200 x 100, Yoke mount for optional
Netværk	:	M12 8-pin for LAN with waterproof cover and chain
Opløsning	:	1920 x 1080
Porte	:	M12 8-pin COM1, RS-232/422/485, default RS-232, with waterproof cover and chain
Skærm	:	23.8"





DANBIT

IPP24IX-IP66

SPECIFICATIONS

Dimensioner : 656 x 423 x 53 mm



Danbit A/S Værkstedvej 39 Køge, 4600 Denmark



+45 56662020



salg@danbit.dk

For business customers only (B2B). Prices exclude VAT. We reserve the right to correct errors and make changes.