


21,5" Panel PC ATEX/IECEX Zone2, Zone22 og C1D2/C2D2/C3 certificeret Intel N2930

FEATURES

- 21,5" TFT-LCD
- Intel Celeron-processor N2930
- 8GB DDR3L ombord
- 1 x 128 GB 2,5" MLC SSD monteret
- 1 x 64 GB mSATA MLC SSD monteret
- 316 rustfrit stål chassis
- Total IP66-klasse med M12 vandtæt stik
- Forskellige IO-applikationer
- Bredt område DC 9~36V strømindgang
- Support Panel Mount & VESA Mount
- Understøtter projekteret kapacitiv berøring
- Fuld flad kant og ventilatorløst design
- ATEX/IECEX Zone2, Zone22 og C1D2/C2D2/C3 certificeret

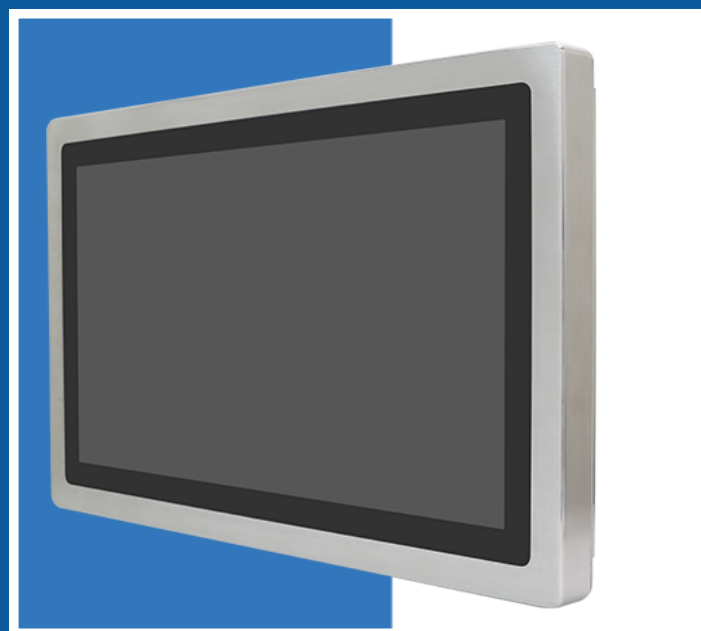

SPECIFICATIONS

CPU	:	Intel Celeron N2930 Processor (2M Cache, 1.83GHz)
Chipset	:	soc
USB	:	1 x M12 8-pin for 2 x USB 2.0 with waterproof cover and chain
Driftstemperatur	:	-20~60°C
Antal farver	:	16.7 M
Ethernet	:	1 x M12 8-pin for LAN with waterproof cover and chain
Forsyning	:	DC 9~36V, 1 x M12 3-pin for DC power connector with waterproof cover and chain
Hukommelse	:	Onboard 4GB/8GB DDR3L 1333MHz
IP-Tæthed	:	IP66 total
Kontrast	:	3000:1
LCD	:	21.5"
Luftfugtighed	:	10 to 95% @ 40C, non-condensing



SPECIFICATIONS

Montering	:	Vesa mount, OPTION!: Panel mount
mPCIe	:	1 x Mini-PCIe (full Size)
Msata	:	1 x mSATA
Mål og vægt	:	12.6Kg
OS SUPPORT	:	Windows embedded 7 Windows embedded 8.1 Windows 10 IoT ENT LTSB
Porte	:	1 x M12 8-pin for COM1, RS232/422/485, Default RS232, with waterproff cover and chain
Skærm	:	1920 x 1080
SSD	:	1 x 2.5" HDD/SSD, 1 x Internal removable SD CARD space
Strømforbrug	:	35 Watt
Touch	:	Projected Capacitive Touch, USB, Light transmission 90%
Udgange	:	1xM12 8-pin for VGA with waterproff cover and chain



SPECIFICATIONS

Nits : 300 cd2/m

Dimensioner : 571x362x75.1mm

Certifications : CE / FCC Class A ATE_x / IECEx Zone2 Ex ec ic IIC T4 Gc ATE_x / IECEx Zone22 Ex tc IIIC T135°C Dc Class I, Division2, Group A,B,C,D,T4 Class II, Division2, Group F,G, T135°C Class III ANSI/ISA 12.12-01-2013 CSA Std., C22 No213-1987

