


21,5" skærm, ATEX Zone2/22 Godkendt, Projekteret
Kapacitiv Touch, VGA, USB

FEATURES

- 21,5" TFT-LCD
- 1920 x 1080 Opløsning
- Projekteret kapacitiv touch via USB
- VGA videoudgang
- Total IP66-klasse med M12 vandtæt stik
- Strømindgang 9-36VDC
- Panelmontering & VESA-montering
- 316 Stainless Steel
- ATEX/IECEX Zone2, Zone22 og C1D2/C2D2/C3 certificeret

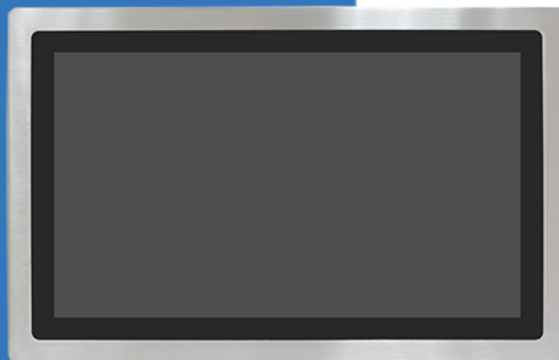

SPECIFICATIONS

Video	:	1 x M12 12-pin for VGA with waterproof cover and chain
USB	:	1 x M12 8-pin for 2 x USB 2.0 for Touch Control with waterproof cover and chain
Driftstemperatur	:	-20~60°C
Forsyning	:	DC 9~36V, 1 x M12 3-pin for DC power connector with waterproof cover and chain
Lysstyrke	:	ca. 300 cd/m ²
Opløsning	:	1920 x 1080
OSD	:	1 x M12 8-pin for OSD Cable & External OSD BOX with waterproof cover and chain
Touch	:	Projected capacitive touch
Vægt	:	12.3 kg
Dimensioner	:	571 x 362 x 75.1 mm
Certification	:	ATEX / IECEx Zone2 / Zone22

