

Industrielt microATX-bundkort med Intel® Core™ CPU (14./13./12. generation), DDR4, dobbelt 10GbE LAN FEATURES

Understøtter Intel® Core™ CPU'er (14./13./12. generation), LGA 1700-sokkel

4 x DDR4 UDIMM, op til 128 GB ECC/ikke-ECC-hukommelse

Understøttelse af fire skærme: VGA, 2x DP++, HDMI 2.0a (understøttet 4K-opløsning)

LAN-forbindelse: 2x 10GbE-porte + 2x 2,5GbE-porte

Udvidelsespladser: 1x PCIe x16 (Gen5), 2x PCIe x4 (Gen4), 1x PCIe x4 (Gen3)

M.2-stik: 2x M.2 2242/2260/2280 M-nøgle (NVMe/SATA), 1x M.2 2230 E-nøgle (Wi-Fi/BT)

Lagring: 4x SATA III-porte (RAID 0/1/5/10)


Rig I/O: 2x COM (RS-232/422/485), 6x USB 3.2 Gen2, 4x USB 3.2 Gen1, 3x USB 2.0

Lyd: Realtek ALC888 codec, Line-out, mikrofonindgang, valgfri Line-in

Driftstemperatur: -5°C til 65°C

Formfaktor: microATX (244 x 244 mm)

ATX-strømsluk: 24-bens + 8-bens (12V)

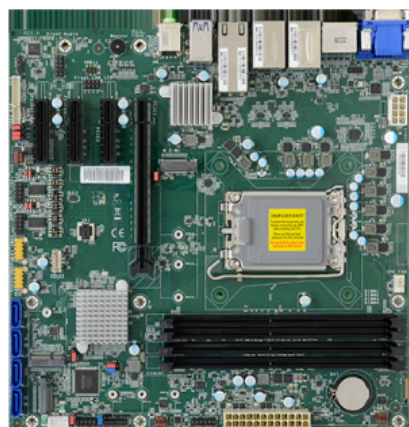

SPECIFICATIONS

CPU	:	Intel® Core™ 14th/13th/12th Gen CPUs (LGA 1700)
Storage	:	4x SATA III ports, RAID 0/1/5/10 supported
Digital I/O	:	8-bit DIO
Video	:	Intel® UHD Graphics, Quad Display (VGA + 2x DP++ + HDMI)
USB	:	6x USB 3.2 Gen2 4x USB 3.2 Gen1 3x USB 2.0
Serial	:	2x COM (RS-232/422/485)
LAN	:	2x 10GbE LAN ports (Intel X550-AT2), 2x 2.5GbE LAN ports (Intel I226-LM/V)
Driftstemperatur	:	-5°C to 65°C
Lyd	:	Realtek ALC888 Codec, Line-out, Mic-in, optional Line-in
M.2	:	2x M-Key (NVMe PCIe Gen4/SATA) 1x E-Key (Wi-Fi/Bluetooth/CNVi)
PCI Express	:	1x PCIe x16 (Gen5) 2x PCIe x4 (Gen4) 1x PCIe x4 (Gen3)
RAM	:	4x DDR4 UDIMM, up to 128GB (ECC/Non-ECC), 3200 MHz



**DANBIT**

BK1700-MITX-R680E

SPECIFICATIONS

Certification : CE, FCC Class B, RoHS, UKCA



Danbit A/S Værkstedvej 39 Køge, 4600 Denmark



+45 56662020



salg@danbit.dk

For business customers only (B2B). Prices exclude VAT. We reserve the right to correct errors and make changes.