


1 ch 4 - 20mA power logs. Wireless to collector up to 150m, external term block. Bluetooth IP64. Battery operation

## FEATURES

Wireless Temperature Logger with memory  
Med Bluetooth. T&D Thermo APP  
Sending measurement data to Data Collector (Base Station) at 870MHz  
Distance between Data Logger and Data collector up to 150 meters  
Battery operation up to 10 months at an upload per day  
16,000 measurements in memory with the date and time stamp  
Accuracy of measurement:  $0.05\text{mA} + 3\%$  at a measuring range from 10 to 40 ° C  
Removable external terminal block. Close O-ring  
Free Cloud service: TD WebStorage for Data Collector  
LCD display shows current measurements  
PC software: tools and presentation included  
Data Logger setup with Data Collector Optical  
Dimensions: 62 x 47 x 19 mm  
Battery type: LS14250 x 1

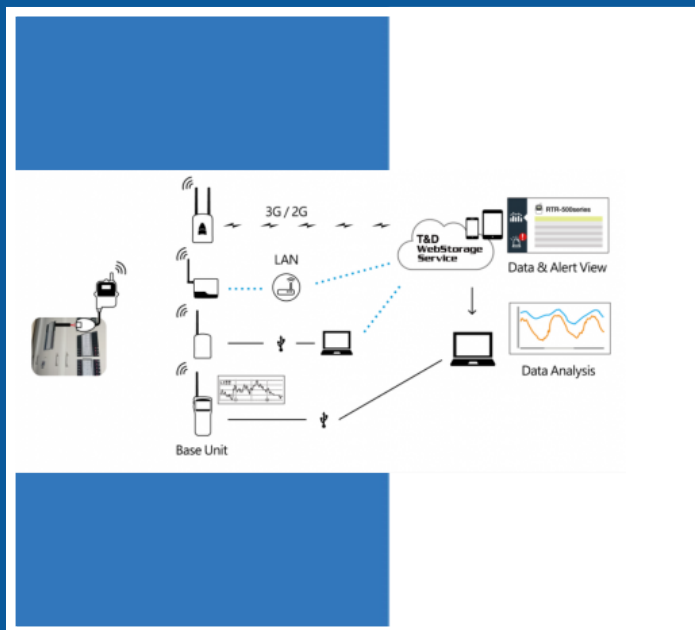

## SPECIFICATIONS

Andet	:	
Kabel	:	
Montering	:	
Måleområde	:	Strøm måling 4 - 20 mA. Impedans 100 $\Omega$ . Opløsning 10 $\mu$ A

