


1 channel Temperature logger. For Pt100 / Pt1000.
Wireless to collect up to 150m, Bluetooth. Term
block. IP64. Battery operation

FEATURES

- Wireless Temperature Logger with memory
- Bluetooth T&D APP
- For Pt100 and Pt1000 3-wire
- Temperature: -199 - + 600°C, +/-0.3°C + 0.3%
- Sends measurement data to Data Collector (Base Station) on 870MHz
- Distance between Datalogger and Data Collector up to 150 meters
- Battery operation up to 10 months with one upload per day
- Data loggers are not on-line
- 16,000 measurements in memory with date and time stamp
- Removable external terminal block. Close with O-ring
- Free Cloud service: TD WebStorage for Data Collector
- LCD display shows current measurements
- PC software: tools and presentation included
- Data logger setup with Data Collector Optical
- Dimensions: 62 x 47 x 19 mm
- Fixed antenna: 24 mm
- Battery type: LS14250 x 1

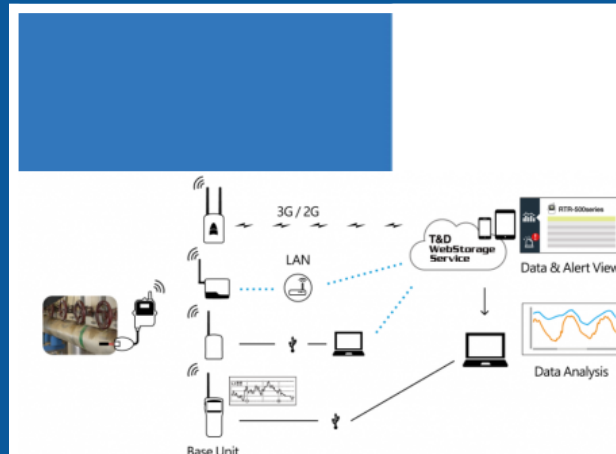

SPECIFICATIONS

Kabel	:	90cm
Måleområde	:	Til ekstern PT 100 eller 1000 føler 3 tråds - 199 - 600 °C
Nøjagtighed	:	$\pm(0.3\text{ °C}+0.3\text{ \% of reading})$ at 10 to 40 °C $\pm(0.5\text{ °C}+0.3\text{ \% of reading})$ at -40 to 10 °C, 40 to 80 °C
Opløsning	:	0.1 °C
Dimensioner	:	62 mm (H)

