


Internal M.2 interface card and adapter, converter,
SATA 6Gb / s, U.2, NVMe, SATA 22pin

FEATURES

- U.2 SFF-8639 NVME / SATA 22 PIN for 1 x M.2 Convert
- 1 x U.2 SFF-8639 Han connector
- 1 x SATA 6 GB / S 22 Pin
- 1 X 67 Pin M.2
- SATA / PCIE slot
- NVME M.2 can only be used with U.2 SFF-8639 Port
- SATA M.2 can only be used with SATA Port

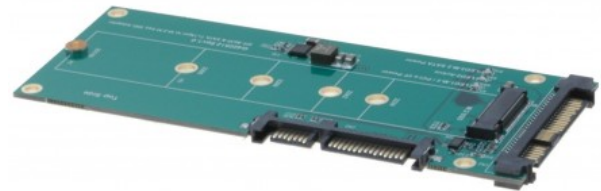

SPECIFICATIONS

ESD	:	ESD protection up to 2 kV
LED	:	power and activity
OS SUPPORT	:	Linux ex Kernel 3.2 Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
Slot	:	PCIe SATA
Stik	:	1 x U.2 SFF-8639 male (for PCIe SSDs 2 or 4 lanes) 1 x SATA 6 Gb/s 22 pin receptacle (for SATA SSDs) 1 x 67 pin M.2 key M slot
Dimensioner	:	(LxWxH): ca. 130 x 52 x 6 mm

