


Fanless Embedded PC with Intel® Celeron® N3350, 2 HDMI, 2 GbE LANs and 6 USB, OS support Win 10 IoT, Linux

FEATURES

- Fanless
- Intel® Celeron® N3350 2.4 GHz
- 1 x 204-pin DDR3L-1600 SO-DIMM, max. 8GB
- 2x HDMI
- 1x COM
- 6 x USB
- 2x GbE LANs
- 2 PCI Express Mini card slots for WLAN and WWAN
- A swappable 2.5" SATA SSD
- Supports Jumbo Frame (9k), WoL, PXE Remote Boot
- Suitable for smart retail and light industrial applications
- 5°C to +60°C (+23°F to +140°F) (requires WT DRAM & SSD)
- OS Support: Win 10 IoT, Linux

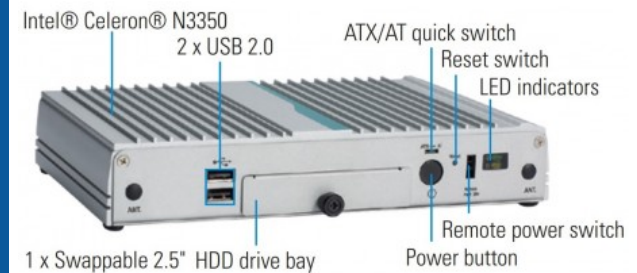

SPECIFICATIONS

CPU	:	Intel® Celeron® N3350 2.4 GHz with turbo boost
Storage	:	1 x SATA HDD drive bay (max. up 9.5 mm height)
Chipset	:	SoC Integrated
USB	:	2 x USB 3.0 4 x USB 2.0
Operating Temp.	:	-5°C to +60°C (+23°F to +140°F) (with W.T. DRAM & SSD)
Andet	:	1 x ATX power switch 1 x ATX/AT quick switch 1 x Reset button 1 x Remote power switch
BIOS	:	AMI UEFI BIOS
Antenne	:	4 x Antenna opening
Approval	:	CE, FCC Class A
Chok/Vibration	:	Endurance 3 Grms with SSD (5 to 500 Hz, X, Y, Z directions)
Ethernet	:	2 x 10/100/1000 Mbps Ethernet (Intel® i211-AT)
Forsyning	:	Power Input 12 VDC, NO adapter included, screw type connector



SPECIFICATIONS

Hukommelse	:	1 x 204-pin DDR3L-1600 SO-DIMM, up to 8GB
Luftfugtighed	:	10% to 90%, non-condensing
Montering	:	Option kit for Wall, DIN, Vesa mount
mPCIe	:	Interface 2 x Full-size PCI Express Mini Card slot (USB + PCIe)
OS SUPPORT	:	WIN 10 IoT, Linux
SIM kort	:	1 x SIM slot
Watchdog	:	Watchdog Timer 255 levels, 1 to 255 sec.
Weight	:	(net/gross) 1.15 kg (2.53 lb)/1.5 kg (3.3 lb)
Dimensioner	:	216 mm (8.5") x 137.65 mm (5.41") x 38 mm (1.49")

