

Micro ATX motherboard Intel C236, 2 x PCIe, 2 x PCI,
8 x RS232, 2 x RS232 / 422/48513 x USB
FEATURES

Intel® 6/7th Generation Core™ Process (Max. TDP at 95W)

Intel® C236 Chipset

4 x 288-pin DDR4 2400MHz DIMM supports up to 64GB (ECC memory supported by CPU)

1 x VGA, 2 x HDMI 1.4

1 x Full size Mini PCI-e support SATA/PCI-e x1 2.0 signal) with SIM card slot

1 x PCI-e x 16, 1 x PCI-e x 4, 2 x PCI


5 x USB2.0, 8 x USB 3.0

8 x RS232

Support RAID 0, 1, 5, 10

Onboard Infineon SLB9665

support TPM 2.0ATX Power

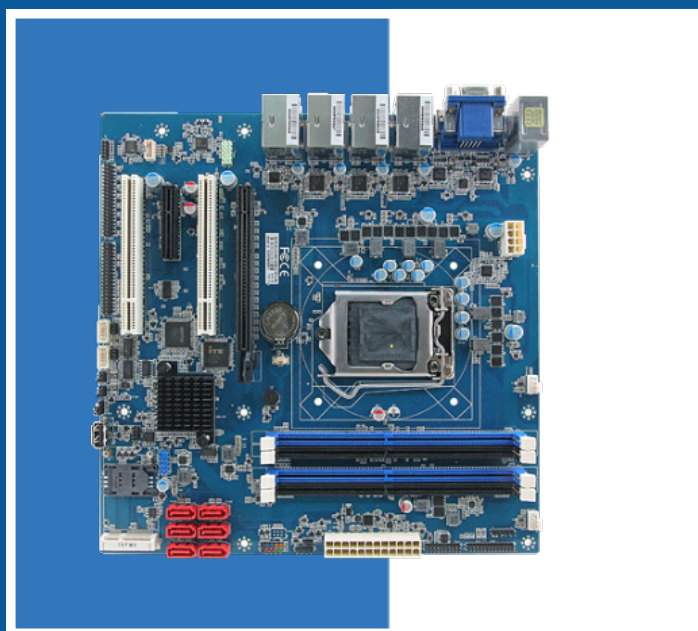

SPECIFICATIONS

CPU	:	Intel® LGA1151 Socket Supports 6/7th Generation Core™ / Intel® Xeon® Process E3-1200 v5/6 Family (Workstation) / Intel® Pentium® / Celeron® Processors (Max. TDP at 95W)
Chipset	:	Intel® C236 Chipset
Digital I/O	:	1 x 16-bit GPIO
USB	:	5 x USB 2.0 8 x USB 3.0
Operating Temp.	:	0~60°C (32~140°F)
Andet	:	ACPI Single power ATX Support S0, S3, S4, S5 Power Type AT/ATX
Ethernet	:	Ethernet LAN Port 4 x RJ-45 Chipset 1 x Intel® I219LM Gigabit Ethernet PHY, 3 x Intel® I211AT PCI-e Gigabit
Forsyning	:	+12V/+5V/5VSB/+3.3V/-12V
Grafik	:	Chipset Intel® 7th Generation CPU integrated HDMI + HDMI, HDMI + VGA, VGA + HDMI
Hukommelse	:	4 x 288-pin DDR4 2400MHz DIMM supports up to 64GB
Lyd	:	Chipset Realtek ALC662 HD Audio Decoding Controller Audio Interface Line-in, Mic-in, Line-out by Front Audio Audio Amplifier 2 x 3W Amplifier
mPCIe	:	1 x Full Size Mini-PCIe supports SATA/PCI-ex1 2.0 signalMicro ATX Board



SPECIFICATIONS

PCI	:	1 x PCI-e x 16 1 x PCI-e x 4
PCI	:	2 x PCI
Porte	:	8 x RS232 by 2 x 40pin pin header 2 x RS232/422/485
SATA	:	6 x SATA III
SIM kort	:	1 x SIM card slot
Tastatur/mus	:	1 x PS/2 Keyboard or 1 x PS/2 Mouse
TPM	:	Onboard Infineon SLB9665 support TPM 2.0
Udgange	:	Multiple Display Triple Displayor, 2 x HDMI, 1 x VGA (HDMI 1,4)
Watchdog	:	H/W Reset, 5~255 seconds/5~255 minutes
Weight	:	0.6 Kg
Dimensioner	:	(L x W) 9.6" x 9.6" (243.84mm x 243.84mm)

