




5 Port Unmanaged Industrial Switch. 5 x 10/100Mbit.
-25 - +70°C. DIN rail mounting, 18-32VDC

FEATURES

- 5 x 10 / 100TX Ports with Auto MDI / MDI-X
- Good size for industrial use
- 18-32VDC
- relay port alerting
- Support AC 1.5KV Hi-pot isolation protection IP31
- Aluminum
- Operating temperature: -25 to 70 degrees
- Dimensions: 111.8mm (H) x 30mm (W) x 98.2mm (D)
- Weight: 290g box without

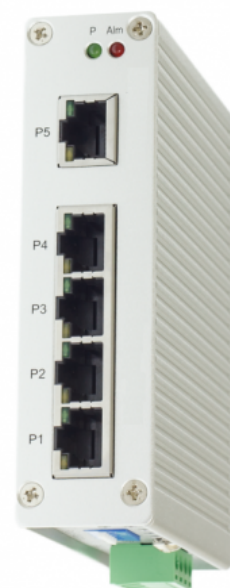

SPECIFICATIONS

Operating Temp.	:	-25 ~ 700 C / -40 ~ 750 C (Udvidet temperatur)
Alarm	:	DIP 1~5: Port Event Alarm Control On: Enable port link down alarm Off: Disable port link down alarm
Approval	:	FCC Class A, CE/EN55022, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8
Chok/Vibration	:	IEC60068-2-27 , IEC60068-2-6
Forbindelse	:	10/100 Base-TX: RJ-45
Forsyning	:	DC 18~32V with reverse polarity protection
Interface	:	5 x 10/100 Base-TX with Auto MDI/MDI-X, Auto-Negotiation function
Kabel	:	Cat.3, Cat.4, Cat.5 unshielded twisted pair or shielded twisted pair cable. The Link distance is maximum 100
Compositions	:	Aluminum case with IP31 protection
Standarder	:	IEEE802.3 10Base-T IEEE802.3u 100Base-TX
Switch	:	3.2Gbps switch fabric
Weight	:	372g with package 290g without package

