


1 channel relay COM, NO, NC. 30VDC, 250VAC 10A
via USB, HID

FEATURES

Compact open board with 1 relay output
250VAC / 30VDC / 10A resistive load only
Controlled from USB via HID (E.g. [usb-relay-hid](#))
Supply voltage: 5VDC via USB
No cabinet
Please note no software is included
Get info on USB-RELAY-HID software online.

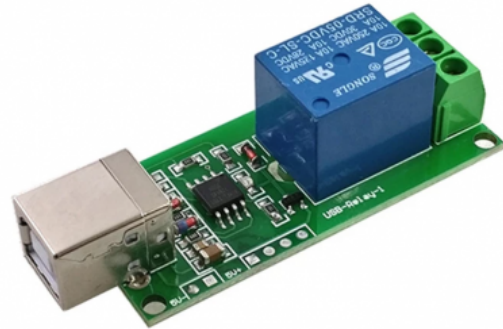

SPECIFICATIONS

Drivere	:	HID Driver
Forsyning	:	5VDC (Via USB)
Software	:	Not included. Compatible with usb-relay-hid
Stik	:	USB-B Hun
Udgange	:	1 skifterelæ 250 VAC 10 A

