


96 channel TTL I/O card, 500kbit/s, PCI Express, Adlink PCIE 7296

FEATURES

- PCI Express card with 96 TTL I/O channels and 3 counters
- X1 PCI Express interface
- 96-CH digital TTL/DTL inputs/outputs
- Emulates 4/2/1 industry standard 8255 PPI (mode 0)
- Direct interface with OPTO-22 compatible I/O modules
- Output port status read back
- On board 8254 timer/counter chip
- Programmable interrupt source
- Support Windows 7/8 X64/X86 and Windows 2008 R2

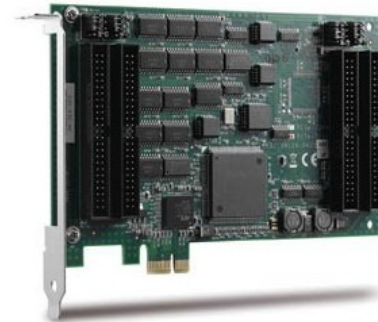

SPECIFICATIONS

Dimensioner	:	121 x 168 mm
Ind- og udgange	:	96 programmerbare TTL I/O kanaler
Software	:	Drivere til Windows 2000, XP, Win7 og Win8 Labview og Linux medfølger
Stik	:	4 x 50-polet IDC
Tæller	:	3 stk med 2 MHz clock eller ekstern trigger

