


CNV232I422DB9

Isolated RS232 to RS422 converter works both ways

FEATURES

- transfer mode RS422 - full duplex
- max.transfer rate 115 kb/s
- max. line length 1 200 m
- transferred signals RxD, TxD
- selectable terminator 120R
- connector RS232 D - SUB 9 pin F
- connector RS422 D - SUB 9 pin M
- galvanic indication (LED) red PWR, yellow RxD, green TxD
- power supply 12V + -10%
- input supply max. 1W
- dimension 63 x 17 x 34 mm

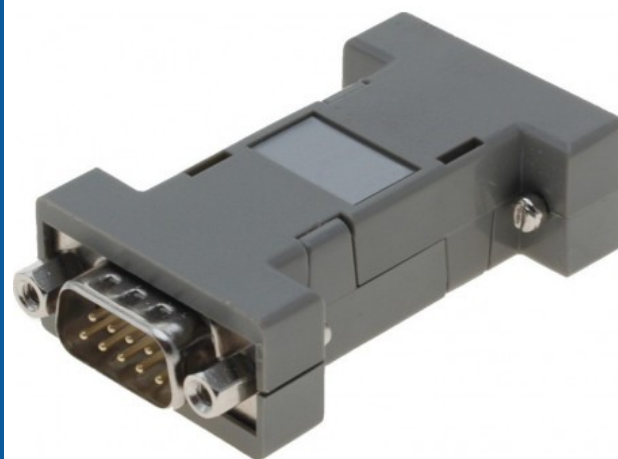

**DANBIT**

CNV232I422DB9

SPECIFICATIONS

Forsyning	:	Ekstern strømforsyning på 12 VDC medfølger. Strømforbrug ca. 1 W
Isolation	:	1 kV



Danbit A/S Værkstedvej 39 Køge, 4600 Denmark



+45 56662020



salg@danbit.dk

For business customers only (B2B). Prices exclude VAT. We reserve the right to correct errors and make changes.