


RFID Reader for Mifare Ultralight and Mifare1
Standard Card, Wiegand, MSR ABA TK2 and RS232
Interface, 5 - 18VDC

FEATURES

- Reading distance: Up to 5 cm
- Frequency: 13.56 MHz
- Read Mifare Ultralight and Mifare F1 Standard Tag
- Mifare 1024/4096 byte, Ultralight 512bit, ISO 14443A
- 3 in 1 interface : Wiegand, MSR ABA TK2 and RS232
- LED and Buzzer
- Quick Data Transfer
- Weatherproof, ABS
- Cable Length: 90 cm
- Cable is not terminated with DB9
- Easy to install
- Supply: 5 - 18VDC (Liniary PSU)
- Dim: 83 x 47 x 16 mm

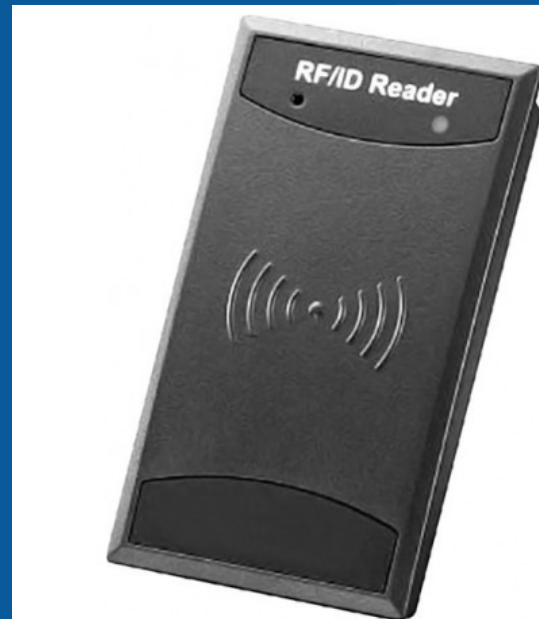

SPECIFICATIONS

Operating Temp.	:	-10 til +60 °C
Andet	:	Monteret med 90 cm kabel
Interface	:	Wiegand og RS232
Rækkevidde	:	Op til 5 cm
Tag-typer	:	Mifare Classic 1k og 4k Mifare Ultralight Mifare DESFire
Udformning	:	Til montering på væg
Dimensioner	:	47 x 83 x 16 mm

